

H SERIE

« HV MODEL »



LIGHT HOLDER BOLTED

BOLTED WING



SWIVEL SPINNER



MUNICIPAL LIGHT BOLTED



LOCK

SPINNER AJUSTABLE HEIGHT

SPREADER LENGTH	10'	12'	14'	16'
Capacity (Cu. Yd.)	8	10	12	14
Truck application	Single axle	Single axle	Tandem	Tandem
Recommended C.A.	84"	102" to 108"	102" to 108"	120" to 132"
Hopper Length	115 3/4"	139 3/4"	163 3/4"	187 3/4"
Hopper Width Std/insert	92"/84"	92"/84"	92"/84"	92"/84"
Overall Length	120"	144"	168"	192"
Overall Width	102"	102"	102"	102"
Overall Height Std/insert	86"/79"	86"/79"	86"/79"	86"/79"
Central conveyor chain width	24"	24"	24"	24"
Front conveyor chain width	14"	14"	14"	14"
* Approx. Weight (Pounds)	4000	4805	5505	6406

*Total weight includes all mechanicals and hydraulics components.

FEATURES & BENEFITS

- 25:1 Gear box
- Front conveyor driving shaft 1" & 1-3/4" for longitudinal conveyor
- D88k chain used for longitudinal conveyor & 667 x chain for front conveyor, along with flat bar, bented extremities welded-on each sides
- Chain tension adjusters on longitudinal and front conveyor
- Driver's side fold down ladder (bolted-on)
- Front conveyor bolted-on and removable
- Inclined side wings to prevent snow and water accumulation
- Removable side wings for quick and easy insert in a dump body
- 40° slope on each side
- Higher and steeper wire netting to facilitate loading
- Bolted-on protector guard
- Wire and light kit included, installed
- Sandblasted, primed and painted yellow

OPTIONS

- Removable protectrice sub-plate
- Rubber spinner (Polyurethane)
- 27 US/gal. steel oil tank
- Heated Hopper
- Hopper type insert

*Specifications and illustrations are subject to change without notice.





SHD LANAU

« 4 SEASON BOX »

THE "ULTIMATE" ALL-AROUND
GRAVEL • SALT • SAND • EXCAVATION



LENGHT / CUBIC YARDS	
10x42x48	8 CU/YARDS
10x48x54	9,3 CU/YARDS
11x42x48	8,75 CU/YARDS
11x48x54	10,25 CU/YARDS
12x42x48	9,5 CU/YARDS
12x48x54	11,1 CU/YARDS
13x42x48	10,25 CU/YARDS
13x48x54	12,05 CU/YARDS
14x42x48	11 CU/YARDS
14x48x54	12,9 CU/YARDS
15x42x48	11,75 CU/YARDS
15x48x54	13,75 CU/YARDS
16x42x48	12,5 CU/YARDS
16x48x54	14,7 CU/YARDS

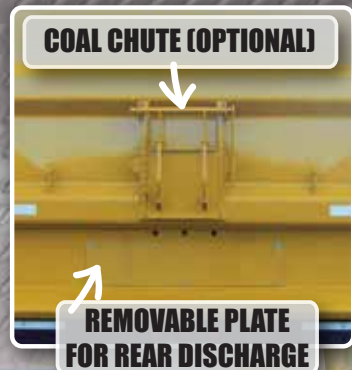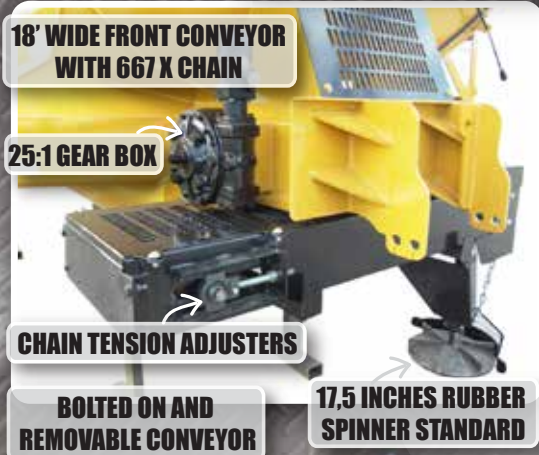

www.lanau-industries.com

COMPONENTS SPECS

GEAR BOX	
RATIO	25:1
SPEED (RPM)	1800
INPUT (EN-LB)	283
OUTPUT (EN-LB)	5856

CONVEYOR MOTOR	MODEL MLHPQ200 LONGITUDINAL		
	RATED	CONTINUOUS	INTERMITTENT
FLOW (GAL./MIN.)	15,1	14,5	17,2
SPEED (RPM)	276	255	300
PRESSURE (PSI)	1596	1596	1813
TORQUE (IN-LB)	2478	2416	2744

CONVEYOR MOTOR	MODEL MLHPQ80		
	RATED	CONTINUOUS	INTERMITTENT
FLOW (GAL./MIN.)	15,1	14,5	17,2
SPEED (RPM)	684	618	730
PRESSURE (PSI)	1799	1813	2176
TORQUE (IN-LB)	1115	1098	1283

OPTIONS

- * Front center discharge.
- * Rear discharge.
- * Both sides simultaneously.
- * Planetary type gearbox.
- * Electronic spreading control.
- * Pre-wet system.
- * Stainless steel option.
- * Pre-wet liquid poly-tanks.